




LXON SERIES

Robust Outdoor Displays



BRILLIANT VISIBILITY WITH UNMATCHED VALUE

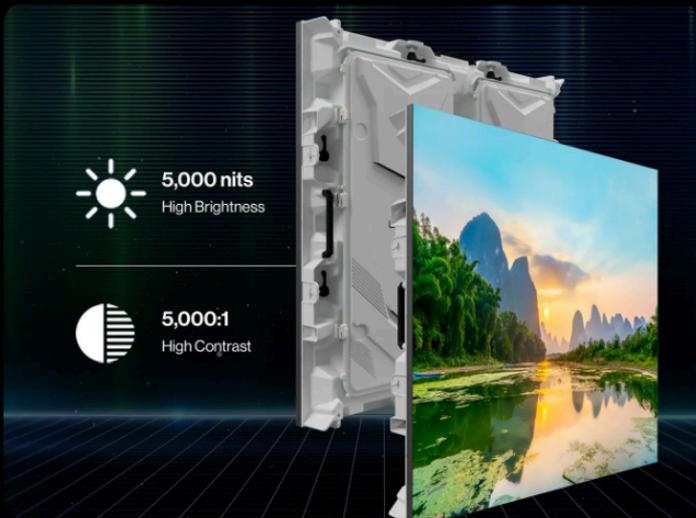

These displays deliver exceptional brightness that ensures clear visibility in daylight. With their outstanding performance and durability.

ENGINEERED FOR ALL-WEATHER RELIABILITY

IP65/54-rated, these LED displays are built for durability, delivering reliable performance in any weather—rain, dust, or extreme temperatures.



PERFECT FLATNESS



Crafted from high-strength die-cast aluminum, these displays ensure exceptional durability and high surface flatness.

EASY SERVICE & MAINTENANCE

Cable-free modules ensure easy and efficient maintenance. Lightweight design allows quick installation and dismantling, saving you valuable time.



SPECIFICATIONS

| Model Name | LXON - 2.5 | LXON - 4 |
|-----------------------------------|------------------------|------------------------|
| Pixel Pitch (mm) | 2.5 mm | 4 mm |
| Cabinet Dimension (W x H x D) mm | 960 x 960 x 125 | 960 x 960 x 115 |
| Weight (kg/m ²) | 30 | 27 |
| Maximum Brightness (nits) | 5000/6000 | 5000/6000 |
| Viewing Angle | 160 x 160 | 160 x 160 |
| Contrast Ratio | 5000 : 1 | 5000 : 1 |
| Max Power (Watts/m ²) | 760 | 687 |
| Refresh Rate (Hz) | 3840 | 1920 |
| Ingress Protection | Front IP65 / Back IP54 | Front IP65 / Back IP54 |
| Cabinet Type | Die - Cast Al | Die - Cast Al |
| Data Processing | 12-14 Bit | 12-14 Bit |
| Service Access | Back | Front / Back |

SPECIFICATIONS

| Model Name | LXON - 5 | LXON - 8 | LXON - 10 |
|-----------------------------------|------------------------|------------------------|------------------------|
| Pixel Pitch (mm) | 5 mm | 8 mm | 10 mm |
| Cabinet Dimension (W x H x D) mm | 960 x 960 x 120 | 960 x 960 x 120 | 960 x 960 x 120 |
| Weight (kg/m ²) | 27 | 27 | 27 |
| Maximum Brightness (nits) | 5000/6000 | 5000/6000 | 5000/6000 |
| Viewing Angle | 160 x 160 | 160 x 160 | 160 x 160 |
| Contrast Ratio | 5000 : 1 | 5000 : 1 | 5000 : 1 |
| Max Power (Watts/m ²) | 733 | 650 | 650 |
| Refresh Rate (Hz) | 1920 | 1920 | 1920 |
| Ingress Protection | Front IP65 / Back IP54 | Front IP65 / Back IP54 | Front IP65 / Back IP54 |
| Cabinet Type | Die - Cast Al | Die - Cast Al | Die - Cast Al |
| Data Processing | 12-14 Bit | 12-14 Bit | 12-14 Bit |
| Service Access | Front / Back | Front / Back | Front / Back |

