


AG SERIES

Value Engineered **Outdoor LED Displays**



BRIGHTNESS UP TO 6000 NITS

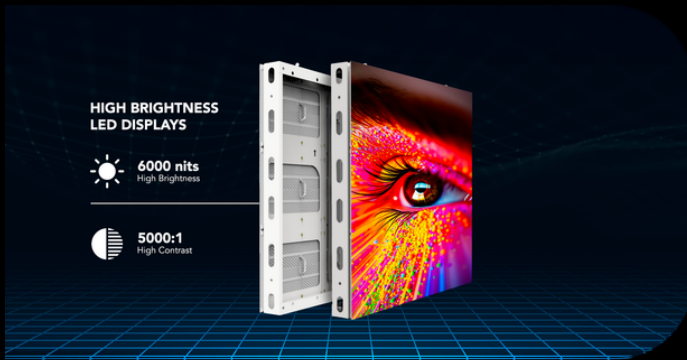


Delivering brightness levels up to 6000 nits, the AG Series ensures vivid visuals and exceptional clarity even under direct sunlight and challenging outdoor lighting conditions.

IP66 RATED – COMPLETE FRONT & REAR PROTECTION

Built to perform in the harshest outdoor environments, Aegis features IP66-rated protection on both front and rear. The rugged, weatherproof construction safeguards against dust, heavy rain and extreme conditions.



PERFECTLY SEAMLESS, IMMERSIVE FROM EVERY ANGLE

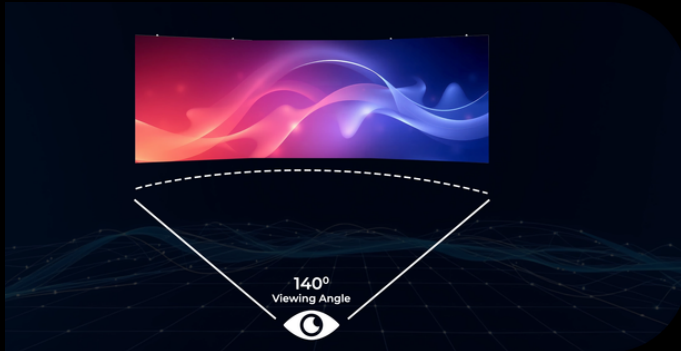

Engineered for creative freedom, Aegis supports seamless corner integration for curved and L-shaped installations. This enables captivating naked-eye 3D visuals with flawless continuity.

LIGHTWEIGHT CABINET DESIGN

Designed for effortless handling and efficient installation, the lightweight cabinet structure enhances deployment flexibility while maintaining durability and long-term outdoor reliability.



SPECIFICATIONS

Model Name	AG - 4	AG - 5	AG - 6.67
Pixel Pitch (mm)	4	5	6.67
Cabinet Dimension (W x H x D, mm)	960 x 960	960 x 960	960 x 960
Weight (kg/m ²)	20.6	20.6	20.6
Service Access	Front/Back	Front/Back	Front/Back
Max Brightness (nits)	4500	4500	4500
Viewing Angle	160 x 160	160 x 160	160 x 160
Contrast Ratio	5000 : 1	5000 : 1	5000 : 1
Max Power (W/m ²)*	688	734	591
Refresh Rate (Hz)	3840	3840	3840
Ingress Protection	Front IP65 / Back IP65	Front IP65 / Back IP65	Front IP65 / Back IP65
Cabinet Type	Die-Cast Al + Steel Frame	Die-Cast Al + Steel Frame	Die-Cast Al + Steel Frame
Data Processing	16 Bit	16 Bit	16 Bit



SPECIFICATIONS

Model Name	AG Pro - 4	AG Pro - 5	AG Pro - 6.67	AG Pro - 8	AG Pro - 10
Pixel Pitch (mm)	4	5	6.67	8	10
Cabinet Dimension (W x H x D, mm)	960 x 960	960 x 960	960 x 960	960 x 960	960 x 960
Weight (kg/m ²)	20.6	20.6	20.6	20.6	20.6
Service Access	Front/Back	Front/Back	Front/Back	Front/Back	Front/Back
Max Brightness (nits)	6000	6000	6000	6000	6000
Viewing Angle	160 x 160	160 x 160	160 x 160	160 x 160	160 x 160
Contrast Ratio	5000:1	5000:1	5000:1	5000:1	5000:1
Max Power (W/m ²)*	564	543	532	532	532
Refresh Rate (Hz)	3840	3840	3840	3840	3840
Ingress Protection	IP65 / IP65	IP65 / IP65	IP65 / IP65	IP65 / IP65	IP65 / IP65
Cabinet Type	Die Cast Aluminum + Steel Frame	Die Cast Aluminum + Steel Frame	Die Cast Aluminum + Steel Frame	Die Cast Aluminum + Steel Frame	Die Cast Aluminum + Steel Frame
Data Processing	16 Bit	16 Bit	16 Bit	16 Bit	16 Bit

