



ET SERIES

Dual Voltage LED Displays




BRIGHT, RELIABLE, AND BUILT TO LAST




High-brightness LED displays with die-cast aluminum housing for maximum daytime visibility, easy installation, and long-lasting, reliable performance.

CABLE FREE MODULES

All cables are neatly routed through the bottom of the cabinet, ensuring a clean, clutter-free appearance while minimizing the risk of accidental disconnection.

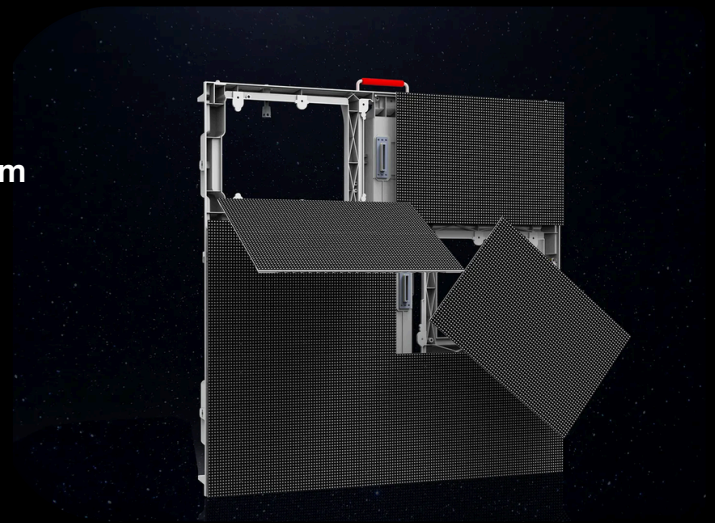


IP66 RATED FRONT & BACK PROTECTION

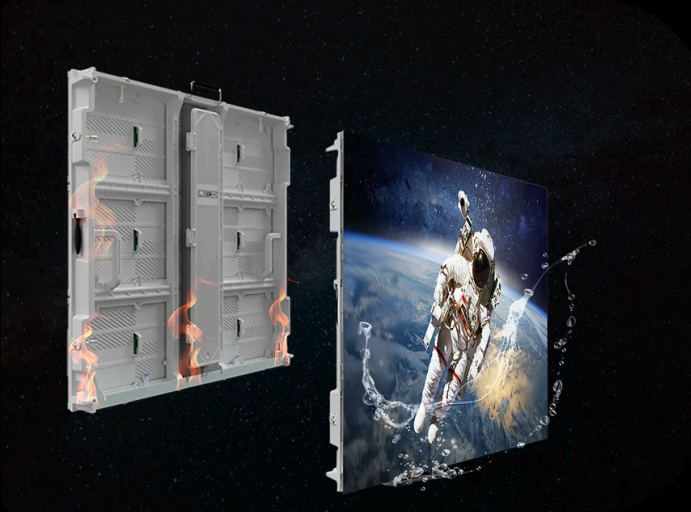


With IP66 rating on both sides and rugged weatherproof cabinets, these LED displays are built to resist dust, rain, and extreme conditions.

MAXIMUM EFFICIENCY WITH DUAL VOLTAGE LED

Using 3.2V for red and 4.2V for green and blue LEDs—compared to the traditional 5V across all—our technology helps save power consumption by at least 30% without compromising brightness.

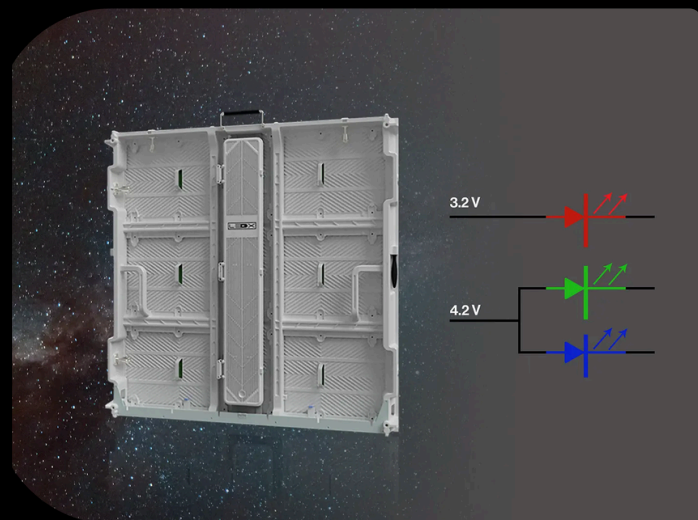


PERFECTLY SEAMLESS. IMMERSIVE IN EVERY ANGLE

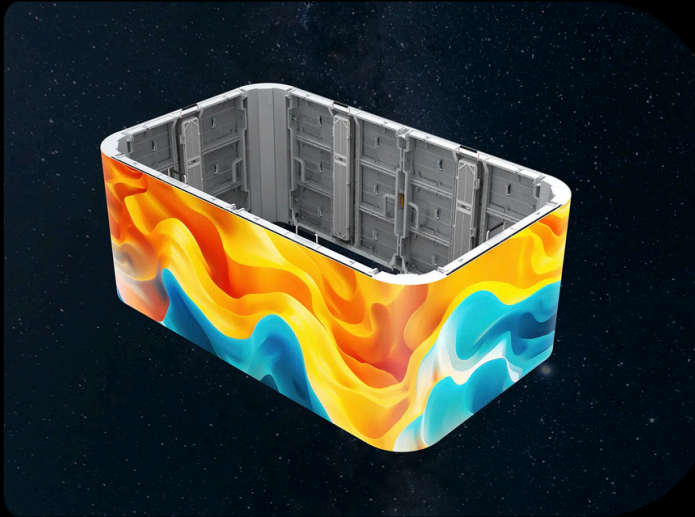

Engineered for curves and L-shaped corners, our seamless corner cabinets enable stunning naked-eye 3D visuals from every angle.

SMARTER POWER, ZERO WASTAGE

Powered by intelligent distribution, energy-saving ICs, and high-efficiency PFC supplies for peak performance with minimal energy loss.

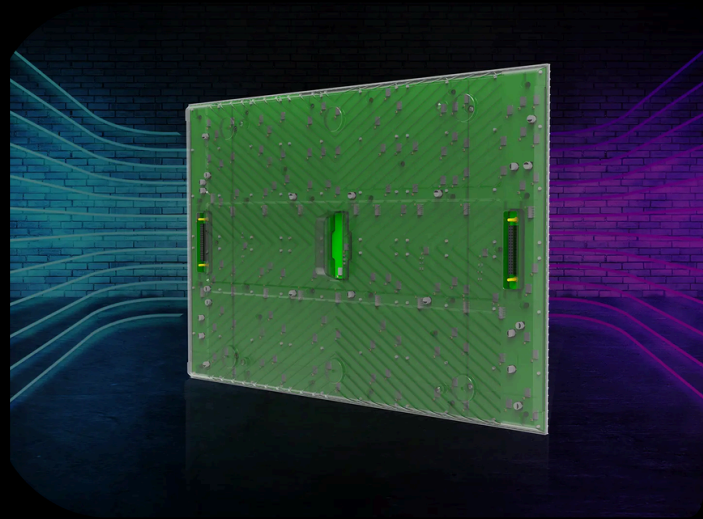

SPECIFICATIONS

Model Name	ET - 6.67	ET - 8	ET - 10
Pixel Pitch (mm)	6.67	8	10
Cabinet Dimension (W x H x D) mm	960x960x88	960x960x88	960x960x88
Weight (kg/m ²)	23	24	22.6
Service Access	Front/Back	Front/Back	Front/Back
Maximum Brightness (nits)	7500	7500	7500
Viewing Angle	160 x 160	160 x 160	160 x 160
Contrast Ratio	5000 : 1	5000 : 1	5000 : 1
Max Power (Watts/m ²)	531	521	510
Refresh Rate (Hz)	3840	3840	3840
Ingress Protection	Front IP66 / Back IP66	Front IP66 / Back IP66	Front IP66 / Back IP66
Cabinet Type	Die Cast Aluminum + Steel Frame	Die Cast Aluminum + Steel Frame	Die Cast Aluminum + Steel Frame
Data Processing	16 Bit	16 Bit	16 Bit



SPECIFICATIONS

Model Name	ET Pro - 6.67	ET Pro - 8	ET Pro - 10	ET Ultra - 6.67
Pixel Pitch (mm)	6.67	8	10	6.67
Cabinet Dimension (W x H x D) mm	960x960x88	960x960x88	960x960x88	960x960x88
Weight (kg/m ²)	23	22.5	22.5	22.6
Service Access	Front/Back	Front/Back	Front/Back	Front/Back
Maximum Brightness (nits)	9000	10000	10000	15000
Viewing Angle	160 x 160	160 x 160	160 x 160	160 x 160
Contrast Ratio	5000 : 1	5000 : 1	5000 : 1	5000 : 1
Max Power (Watts/m ²)	564	553	543	-
Refresh Rate (Hz)	3840	3840	3840	3840
Ingress Protection	Front IP66 / Back IP66	Front IP66 / Back IP66	Front IP66 / Back IP66	Front IP66 / Back IP66
Cabinet Type	Die Cast Aluminum + Steel Frame	Die Cast Aluminum + Steel Frame	Die Cast Aluminum + Steel Frame	Die Cast Aluminum + Steel Frame
Data Processing	16 Bit	16 Bit	16 Bit	16 Bit

