




NX0 SERIES

Robust Outdoor Displays



BRILLIANT VISIBILITY WITH UNMATCHED VALUE

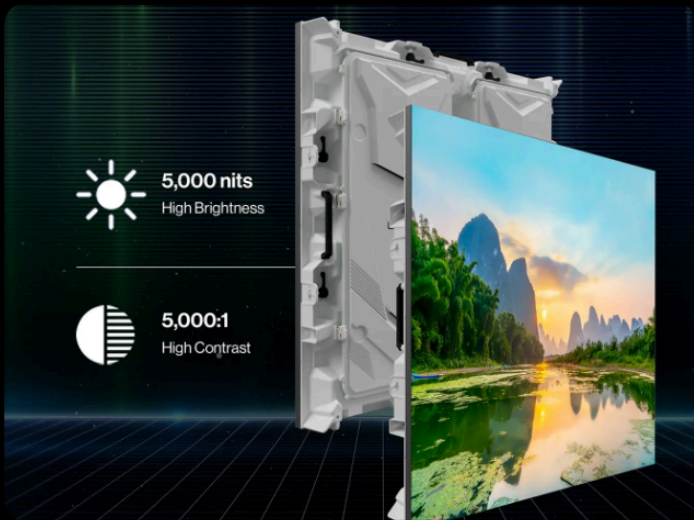

These displays deliver exceptional brightness that ensures clear visibility in daylight. With their outstanding performance and durability.

ENGINEERED FOR ALL-WEATHER RELIABILITY

IP65/54-rated, these LED displays are built for durability, delivering reliable performance in any weather—rain, dust, or extreme temperatures.



PERFECT FLATNESS



Crafted from high-strength die-cast aluminum, these displays ensure exceptional durability and high surface flatness.

EASY SERVICE & MAINTENANCE

Cable-free modules ensure easy and efficient maintenance. Lightweight design allows quick installation and dismantling, saving you valuable time.



SPECIFICATIONS

Model Name	NXO - 2.5	NXO - 4
Pixel Pitch (mm)	2.5 mm	4 mm
Cabinet Dimension (W x H x D) mm	640 x 960 x 125	960 x 960 x 115
Weight (kg/m ²)	30	27
Maximum Brightness (nits)	5000/6000	5000/6000
Viewing Angle	160 x 160	160 x 160
Contrast Ratio	5000 : 1	5000 : 1
Max Power (Watts/m ²)	760	687
Refresh Rate (Hz)	3840	3840
Ingress Protection	Front IP65 / Back IP54	Front IP65 / Back IP54
Cabinet Type	Die - Cast Al	Die - Cast Al
Data Processing	12-14 Bit	12-14 Bit
Service Access	Back	Front / Back

SPECIFICATIONS

Model Name	NXO - 5	NXO - 8	NXO - 10
Pixel Pitch (mm)	5 mm	8 mm	10 mm
Cabinet Dimension (W x H x D) mm	960 x 960 x 120	960 x 960 x 120	960 x 960 x 120
Weight (kg/m ²)	27	27	27
Maximum Brightness (nits)	5000/6000	5000/6000	5000/6000
Viewing Angle	160 x 160	160 x 160	160 x 160
Contrast Ratio	5000 : 1	5000 : 1	5000 : 1
Max Power (Watts/m ²)	733	650	650
Refresh Rate (Hz)	3840	3840	3840
Ingress Protection	Front IP65 / Back IP54	Front IP65 / Back IP54	Front IP65 / Back IP54
Cabinet Type	Die - Cast Al	Die - Cast Al	Die - Cast Al
Data Processing	12-14 Bit	12-14 Bit	12-14 Bit
Service Access	Front / Back	Front / Back	Front / Back

